

TARGETTI

CCT LED ARCHITECTURAL MINI

9° Intensive Spot 4" Professional Adjustable LED Downlight

Concept: Versatile precision small (4") aperture single LED COB downlight with intensive beam on axis candle power.

Housings: Non IC plaster frame and IC/Air tight housings available.

Materials: Painted Black die-cast aluminium heat sink and White polycarbonate body.

Trim Accessories: Multiple styles and finishes of matte polycarbonate trims and secondary reflectors available.

Optics: Optic reflector assembly in 9° narrow spot beam spread.

Mounting: Tool-free spring-clip mounting system into Targetti recessed housings. Decorative trim ring mounted after fixture installation with twist lock attachment.

Driver: Driver available EldoLED 0-10V, Eco (1%) and Solo (0.1%) dimmable drivers.

Wattage: 5W

Color Temperature: 2700K and 3000K standard

Lumens: **2700°K** 147Lm **3000°K** 163Lm

Voltage: 120-277V AC 50/60Hz, 120V or 277V must be specified for correct thermal protector.

IP Rating: IP20, IP43

Certifications: Damp rated cULus listed to UL1598 & UL8750

IC/Air tight housing version is Chicago Plenum Rated.

Tested in accordance with LM-79-08


Warranty: 5 year limited warranty



PRODUCT CODE	DRIVER	OPTICS	WATTAGE	COLOR TEMP	CRI	HOUSING	VOLTAGE	+	TRIM
CCM-I Arc Mini Intensive	E1 — Eldo 1%	NS — Narrow Spot 9°	L1 — 5W	27 — 2700K	84 — 84 CRI	NC — Non-IC Plaster Frame	1 — 120	+	Required
	E0 — Eldo 0.1%			30 — 3000K			IC ¹ — IC/Air Tight Housing		2 — 277

¹ IC/Air tight housing suitable for Chicago Plenum rated installation.

Views

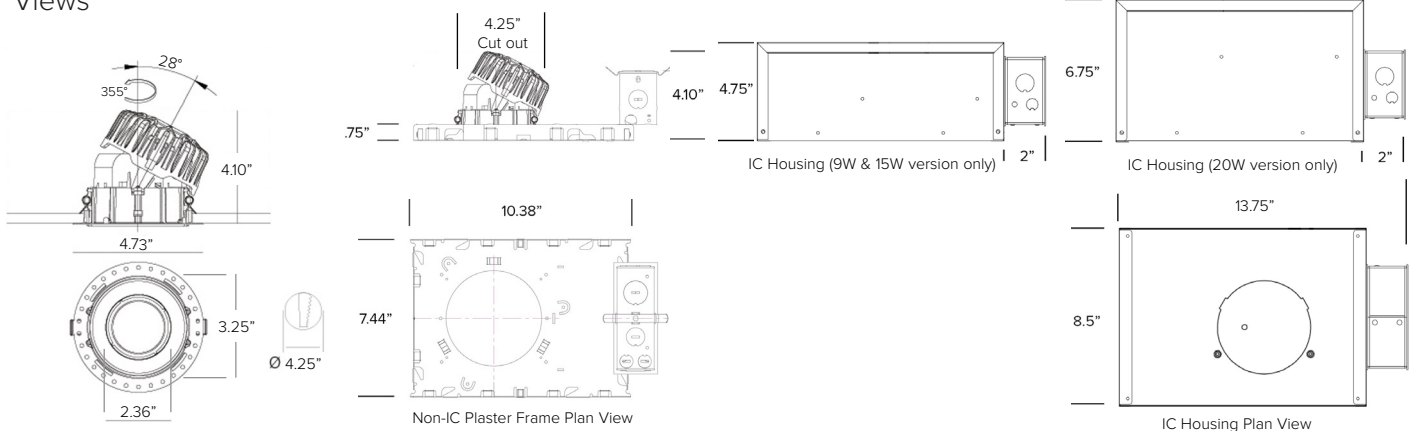

CCT LED ARCHITECTURAL MINI

TRIM (REQUIRED)	
1T4696	Round White Trim
1T4697	Round Black Trim
1T4698	Square/Round White Trim
1T4699	Square/Round Black Trim
1T4702	Pinhole White
1T4703	Pinhole Black
1T4704	Round IP54, White
1T4705	Round IP54, Black
1T4714	Square/Square White Trim/White secondary reflector
1T4715	Square/Square Black Trim/Black secondary reflector
1T4716	Square/Square White Trim/Silver secondary reflector
1T4717	Square/Square White Trim/Black secondary reflector
1T4718	Square/Square White Trim/Copper secondary reflector
1T4719	Square/Square White Trim/Gold secondary reflector
1T4720	Square/Square Black Trim/Gold secondary reflector
Consult Factory	Plaster ring for trimless concave effect. Cutout Ø 14.45". To be completed with one round trim ring listed above.



1T4696



1T4697



1T4698



1T4699



1T4702



1T4703



1T4704



1T4705

SECONDARY REFLECTOR (REQUIRED) * Factory Installed	
1T4710	White
1T4711	Black
1T4712	Copper
1T4713	Gold
1T475A	Silver



Secondary Reflector



Square/Square



Consult Factory


ACCESSORIES	
49881	Chromatic Filter - Red
49882	Chromatic Filter - Green
49886	Chromatic Filter - Blue
49887	Chromatic Filter - Yellow
49959	Chromatic Filter - Magenta
1T1745	Cold Tone Filter
1T1748	Gold Tone Filter
1T1751	Peach Tone Filter
1T4721	Blade of Light Filter
1T4322	Honeycomb Louver
1T4324	Zoom



Chromatic Filter



Tone Filter



1T4721



1T4322



1T4324

TARGETTI

CCT LED ARCHITECTURAL MINI

Photometric Information

NARROW SPOT			POLAR GRAPH	CONE OF LIGHT					
Fixture Power	5W	5W		(Ft)	Alpha=4.3°+4.3°	0=0.0°	Beta=4.3°+4.3°	Max	Med
Fixture Output	147Lm	163Lm		2.00				ftcd	ftcd
Kelvin Temp	2700°K	3000°K		4.00				277	183
Beam Spread	NSP 9°	NSP 9°		6.00				123	81
I _{Max}	22178cd/klm	22178cd/klm		8.00				69	48
Efficacy	30Lm/W	33 Lm/W		10.00				44	29