

TARGETTI

CCT LED ARCHITECTURAL MINI 4" Professional Wall Wash

Concept: Professional single COB LED in small aperture (4") recessed wall wash.

Housing: Non IC plaster frame and IC/Air tight housings available.

Materials: Painted Black die-cast aluminium heat sink and White polycarbonate body.

Trim Accessories: Multiple styles and finishes of matte polycarbonate trims.

Optics: Matte lensed wall wash optic.

Mounting: Tool-free spring-clip mounting system into Targetti recessed housings. Decorative trim ring mounted after fixture installation with twist lock attachment.

Driver: Driver available as Electronic phase or 0-10V dimmable. Also available with EldoLED 0-10V, Eco (1%) and Solo (0.1%) dimmable drivers.

Wattage: 14W and 20W standard

Color Temperature: 2700K and 3000K standard, 84 CRI standard.

Voltage: 120-277V AC 50/60Hz, 120V or 277V must be specified for correct thermal protector.

IP Rating: IP20, IP43

Certifications: Damp rated cULus listed to UL1598 & UL8750

IC/Air tight housing version is Chicago Plenum Rated.

Tested in accordance with LM-79-08

Warranty: 5 year limited warranty




3000°K		2700°K	
14W	20W	14W	20W
Wall Wash = 1,047Lm		1,425Lm	
		995Lm 1354Lm	

PRODUCT CODE	DRIVER	OPTICS	WATTAGE	COLOR TEMP	CRI	HOUSING	VOLTAGE	+	TRIM
CCM-W Arc Mini Wall Wash	EP ¹ — Electronic Phase Dimmable	WW — Wall Wash	L1 — 14W	27 — 2700K	84 — 84 CRI	NC — Non-IC Plaster Frame	1 — 120		Required
	10 — 0-10V		L2 — 20W	30 — 3000K			IC — IC/Air Tight Housing		2 — 277
	E1 — Eldo 1%								
	E0 — Eldo 0.1%								

¹Electronic phase dimmable available for 120V only.
* Lutron 1% ECO system driver available upon request.

Views

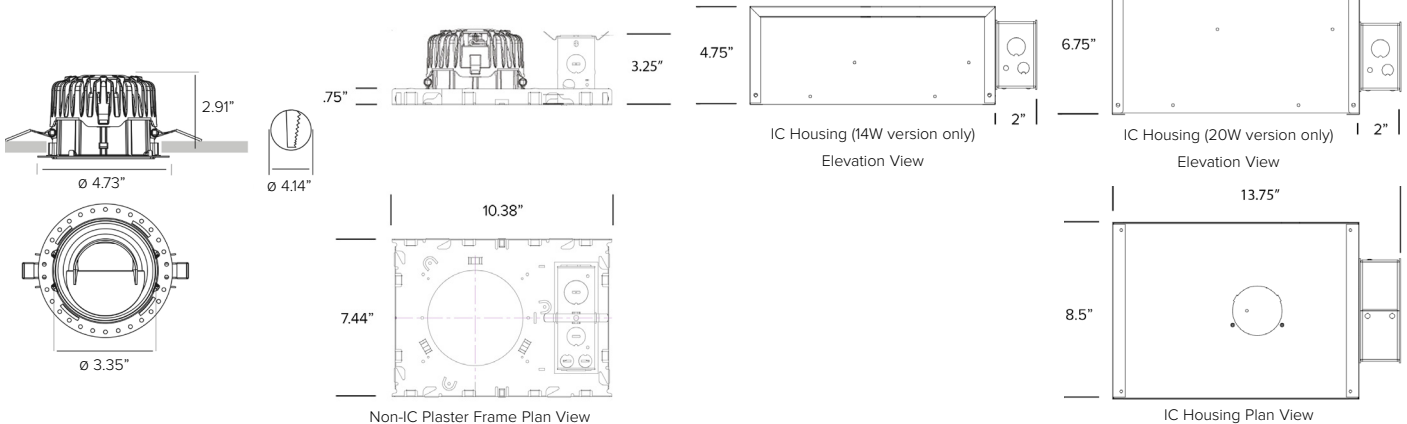

TARGETTI

CCT LED ARCHITECTURAL MINI

TRIM (REQUIRED)	
1T4696	Round White Trim
1T4697	Round Black Trim
1T4698	Square/Round White Trim
1T4699	Square/Round Black Trim
1T4704	Round IP54, White
1T4705	Round IP54, Black
Consult Factory	Plaster ring for trimless concave effect. Cutout Ø 14.45". To be completed with one round trim ring listed above.



1T4696



1T4697



1T4698



1T4699



1T4704



1T4705



Consult Factory

Photometric Information

WALL WASH		POLAR GRAPH	CONE OF LIGHT		
Fixture Power	14W		(Ft)	Max	Med
Fixture Output	995 Lm 1047 Lm		2.00	ftcd	ftcd
Kelvin Temp	2700°K 3000°K		4.00	179	75
Beam Spread	WW WW		6.00	45	19
I _{Max}	398 cd/klm 398 cd/klm		8.00	20	8
Efficacy	71 Lm/W 75 Lm/W		10.00	11	5
			7	3	

WALL WASH		POLAR GRAPH	CONE OF LIGHT		
Fixture Power	20W		(Ft)	Max	Med
Fixture Output	1354 Lm 1425 Lm		2.00	ftcd	ftcd
Kelvin Temp	2700°K 3000°K		4.00	244	102
Beam Spread	WW WW		6.00	61	26
I _{Max}	398 cd/klm 398 cd/klm		8.00	27	11
Efficacy	68 Lm/W Lm/W		10.00	15	6
			10	4	