



DURATAPE™ 120

IP65 ALL ENVIRONMENT

120VAC Line Voltage Tapelight

Energy Efficient line voltage LED flexible linear light strip for continuous consistent color in linear applications. Extremely flexible and adjustable lengths for varied architectural applications.

Key Features

- Connects directly into line voltage by means of 120V two prong plug.
- Energy efficient LED flexible linear light strip for continuous constant color in linear applications
- Ideal for long length interior/exterior coves
- Pre-assembled to specific lengths with various connector options for project requirements and efficient power configuration. Product order lengths must be in 7 $\frac{7}{8}$ " increments
- Shipped with choice of 2 prong 120V AC plug lead or single gang J-Box and free wire connection lead to accommodate application installation requirements
- Clean dimming down to 5% with ELV 120V dimming
- Max continuous length: up to 164' per run



Fixture Data

Model	Efficacy* 3000°K Lm/Wt	Lm/Ft	Wt/Ft
DuraTape 120	97.30*	360	3.70

* Meets Title 24 High efficacy rating.

LED Data

Model	Wt/LED	Viewing Angle	Lifespan at 90% drive
DuraTape 120	0.15W	120°	50,000hrs

* LEDs operating at 90% of LED manufacturers maximum current rating.


Details

Spacing	0.50" OC LED Spacing
LEDs	24 LEDs per foot
Color Temp	Available in 2700°K, 3000°K and 3500°K
Color Consistency	Advanced LED binning with +/- 2-step MacAdam Ellipses
CRI	Available in +84 CRI
Wiring Options	Factory prepared wiring options (See Page 2)
Mounting	Includes installation-ready 3M tape adhesive for simplified installation directly to application surface
Installation	Factory manufactured lengths with directional power connector and 60in lead wire assemblies into different Clip or Channel styles for creating different configurations. Mounting clips and power by connection to with factory attached two prong 120V AC wall socket. NOT FIELD CUTTABLE.
Power Supply	120V AC Power. Each run length includes secondary fuse protection module at start of run.
Listing	UL Listed
Compliance	ROHS compliant
Warranty	3 year warranty

Dimensional Drawings


DL120-PLUG

Shipped with 2 prong 120V AC Plug on 60" lead

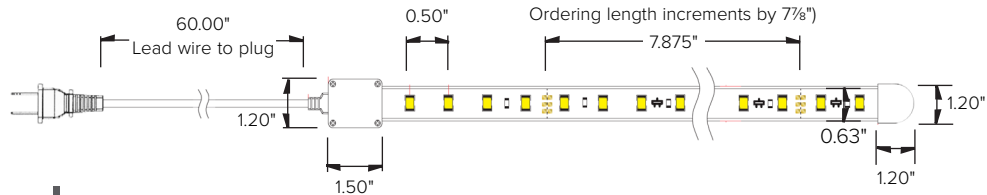

DL120-JCVR20/65

Shipped with single gang J-Box cover and secondary protection thermal breaker set to run length.

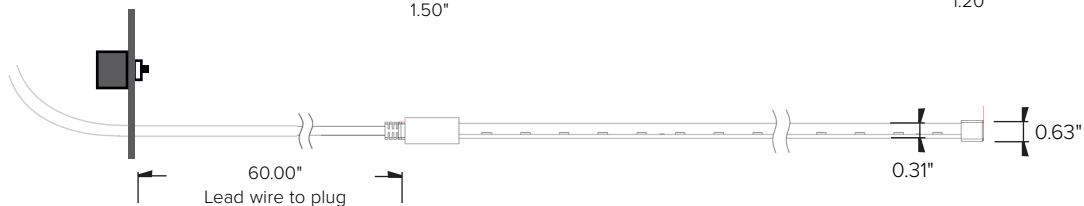

Ordering Guide


PRODUCT CODE	VOLTAGE	IP RATING	COLOR TEMP	CRI
DL — Duratape™ 120 —	120VAC	A — IP65 All Environment	27 — 2700°K	SC — +84 CRI
			30 — 3000°K	
			35 — 3500°K	



DURATAPE™ 120

IP65 ALL ENVIRONMENT

Wiring Options

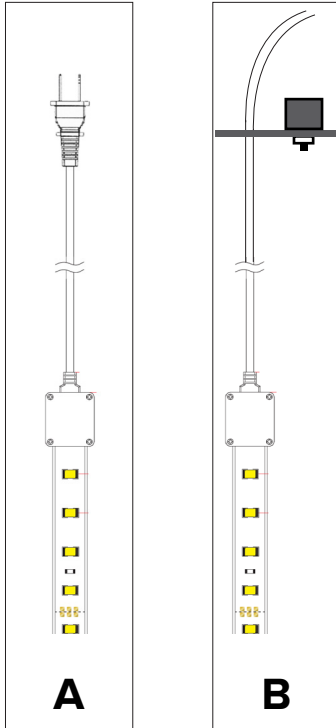

A DL120-PLUG

Lead wire prep. 60" Lead wire/dead end allows for connection to power at lead.

B DL120-JCVR20

Lead wire prep. 60" Lead wire with single gang IP20 indoor J-Box cover and secondary thermal breaker.

DL120-JCVR65

Lead wire prep. 60" Lead wire with single gang IP65 outdoor J-Box cover and secondary thermal breaker.

Mounting Accessories



DL120-CLPKT

Duratape120 mounting clips.
Package of 10 each for 10ft section. #8 countersink screws not included.