

TARGETTI

ZEDGE LINE

Professional Small Scale LED Steplight

Concept: Recessed wall mounted LED fixture.

Materials: Die-cast anodized aluminum body and external frame; powder coated frame. Consult factory for marine grade cataphoresis painting treatment to be used from ocean shoreline to 1/2 mile inland. Fixtures located in marine environments are not to be in direct contact with salt for extended periods of time or used with corrosive agents.

Source: LED High Efficiency Board.

Optic: Polycarbonate opal screen. Floor Washer frame allows for uniform optical distribution on the floor and excellent visual comfort.

Mounting: To be completed with a special nylon outer casing fitted for parallel connection.

Driver: Integrated 4/1 driver (Non-dimmable / 0-10V / Reverse Phase / Forward Phase). Dimmable to 1%.

Finish: Ferrite Grey

Wattage: 9W

Color Temperature: 2700°K / 3000°K / 3500°K / 4000°K

CRI: Ra84

Delivered Lumens: 2700°K 3000°K 3500°K 4000°K
230Lm 245Lm 251Lm 257Lm

Lumen Maintenance (L70): 50,000hrs

Calculation for LED fixtures are based on measurements that comply with IES LM-80.

Voltage: Universal Voltage 120-277V AC 50/60Hz

IK Rating: IK10

IP Rating: IP66

Certifications: cULus Listed Wet Location


Tested in accordance with LM-79-08

^A Title 24 commercial installation compliant.

^B Consult factory for marine grade cataphoresis treatment.


Warranty: 5 year limited warranty

Designed in collaboration with Gensler as Product Design Consultant



PRODUCT CODE	DRIVER	OPTICS	FINISH	WATTAGE	COLOR TEMP	+	INSTALLATION
ZEL – ZEDGE LINE	41 – 4/1 Dimming (Non-Dimming / 0-10V / Reverse Phase / Forward Phase)	FW – Floor Washer	FE – Ferrite Grey	L2 – 9W	27 – 2700K 30 – 3000K 35 – 3500K 40 – 4000K		See page 2


Views

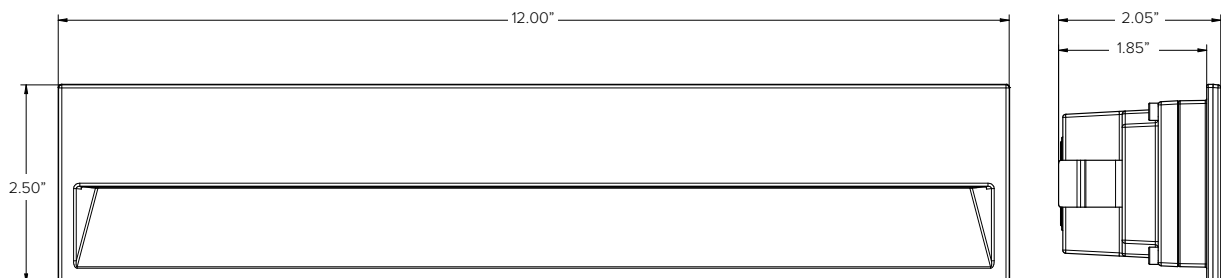

TARGETTI

ZEDGE LINE

INSTALLATION (REQUIRED)	
1E3447	Nylon outer casing fitted for parallel connection with feed through-wiring. 3/4" and 1/2" knock-outs made for EMT connectors and conduit entry. Suitable for concrete pour, drywall, or stucco applications. Dimensions: 12.13"W x 2.7"H x 3"D

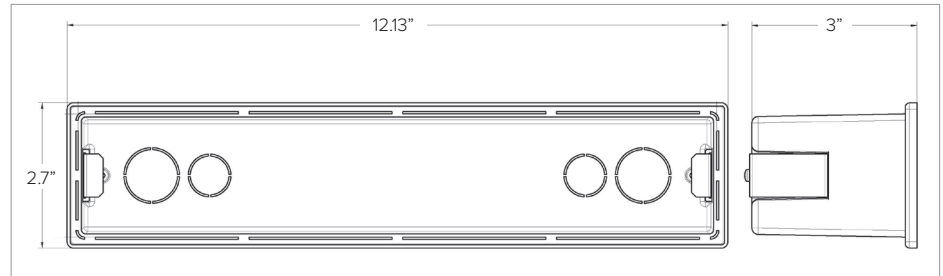

1E3447

Photometry

