

# TARGETTI

## ZEDGE LINE

### Professional Small Scale LED Steplight

**Concept:** Recessed wall mounted LED fixture for indoor and outdoor applications.

**Materials:** Die-cast anodized aluminum body and external frame; powder coated frame. Consult factory for marine grade cataphoresis painting treatment to be used from ocean shoreline to 1/2 mile inland. Fixtures located in marine environments are not to be in direct contact with salt for extended periods of time or used with corrosive agents.

**Source:** LED High Efficiency Board.

**Optic:** Polycarbonate opal screen. Floor Washer frame allows for uniform optical distribution on the floor and excellent visual comfort.

**Mounting:** To be completed with a special nylon outer casing fitted for parallel connection.

**Driver:** Integrated 4/1 driver (Non-dimmable / 0-10V / Reverse Phase / Forward Phase). Dimmable to 1%.

**Finish:** Textured Standard Finishes – Ferrite Grey / Heritage Brown / Bronze RAL 8019 / Plaster White / Deep Black / Sandstone Grey

**Wattage:** 9W

**Color Temperature:** 2700K / 3000K / 3500K / 4000K

**CRI:** Ra84

**Delivered Lumens:** 2700K 3000K 3500K 4000K  
230Lm 245Lm 251Lm 257Lm

**Lumen Maintenance (L70):** 50,000hrs

*Calculation for LED fixtures are based on measurements that comply with IES LM-80.*

**Voltage:** Universal Voltage 120-277V AC 50/60Hz

**IK Rating:** IK10

**IP Rating:** IP66

**Certifications:** cULus Listed Wet Location

Tested in accordance with LM-79-08

<sup>A</sup> Consult factory for marine grade cataphoresis treatment.

Energy efficient for California installations.

**Warranty:** 5 year limited warranty

Designed in collaboration with Gensler as Product Design Consultant




Shown in Ferrite Grey Finish



Suitable for indoor and outdoor applications.

PRODUCT CODE	DRIVER	OPTICS	FINISH	WATTAGE	COLOR TEMP	+	INSTALLATION
ZEL – ZEDGE LINE	41 – 4/1 Dimming (Non-Dimming / 0-10V / Reverse Phase / Forward Phase)	FW – Floor Washer	FE – Ferrite Grey HB – Heritage Brown BZ – Bronze RAL8019 WT – White Textured BT – Black Textured SG – Sandstone Grey	L2 – 9W	27 – 2700K 30 – 3000K 35 – 3500K 40 – 4000K		See page 2

### Views

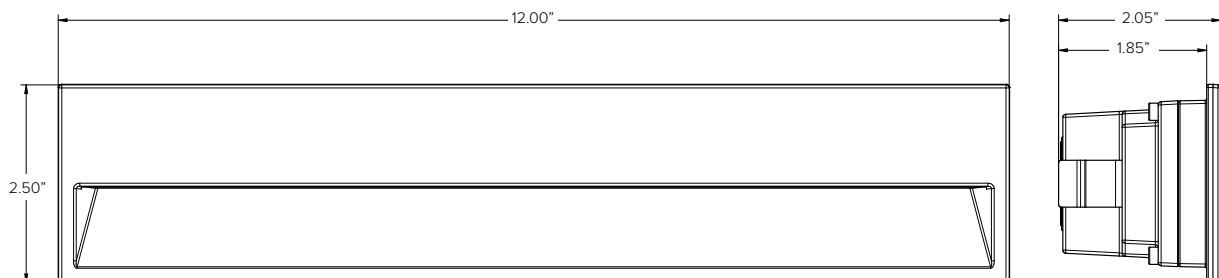


# TARGETTI

## ZEDGE LINE

**INSTALLATION (REQUIRED)**

**1E3447** Nylon outer casing fitted for parallel connection with feed through-wiring. 3/4" and 1/2" knock-outs made for EMT connectors and conduit entry. Suitable for concrete pour, drywall, or stucco applications. Dimensions: 12.13"W x 2.7"H x 3"D

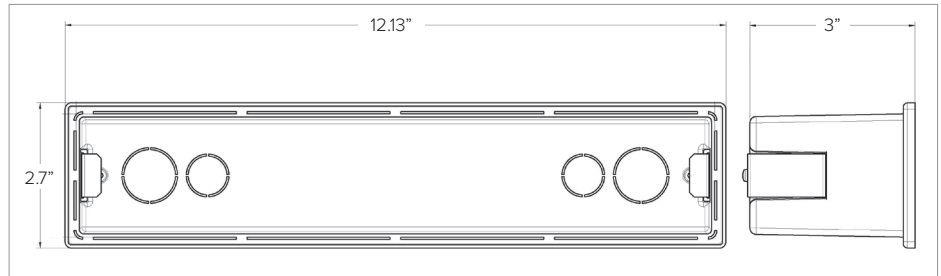

1E3447

### Photometry

#### FLOOR WASHER

	2700K	H(m)	D1(m)	D2(m)	Emax(lx)		
	Ra84		48°	88°			
Fixture Power	9W	1	1.90	2.12	155		
Source Flux	1175lm	2	3.80	4.25	39		
Fixture Flux	230lm	3	5.70	6.37	17		
Efficacy	26lm/W	4	7.60	8.49	10		
TS1128	I <sub>max</sub> =174cd/klm	I <sub>max</sub>	204cd	5	9.50	10.61	6

	3000K	H(m)	D1(m)	D2(m)	Emax(lx)		
	Ra84		48°	88°			
Fixture Power	9W	1	1.90	2.12	165		
Source Flux	1250lm	2	3.80	4.25	41		
Fixture Flux	245lm	3	5.70	6.37	18		
Efficacy	27lm/W	4	7.60	8.49	10		
TS1128	I <sub>max</sub> =174cd/klm	I <sub>max</sub>	217cd	5	9.50	10.61	7

	3500K	H(m)	D1(m)	D2(m)	Emax(lx)		
	Ra84		48°	88°			
Fixture Power	8W	1	1.90	2.12	169		
Source Flux	1280lm	2	3.80	4.25	42		
Fixture Flux	251lm	3	5.70	6.37	19		
Efficacy	31lm/W	4	7.60	8.49	11		
TS1128	I <sub>max</sub> =174cd/klm	I <sub>max</sub>	222cd	5	9.50	10.61	7

	4000K	H(m)	D1(m)	D2(m)	Emax(lx)		
	Ra84		48°	88°			
Fixture Power	9W	1	1.90	2.12	173		
Source Flux	1310lm	2	3.80	4.25	43		
Fixture Flux	257lm	3	5.70	6.37	19		
Efficacy	29lm/W	4	7.60	8.49	11		
TS1128	I <sub>max</sub> =174cd/klm	I <sub>max</sub>	228cd	5	9.50	10.61	7

